
DM10 SPECIFICATIONS

LTETDD	B38/B39/B40	
Power Adapter	DC 12V 3A	
Ethernet	RJ45, 10M/100M	
RS485	1	
Wiegand (DM10)	1 input, 1 output	
Auxiliary in & out (DM10)	1 input, 1 output	
Sensor (DM10)	1	
Exit Button (DM10)	1	
Lock (DM10)	1	
Power out (DM10)	12V DC	
Reset Button	1	



Available on



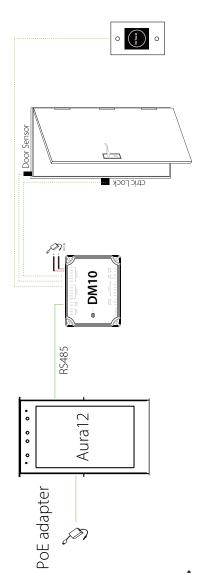



CONFIGURATION

1600 Union Hill Rd., Alpharetta GA 30005

Phone: (862) 505 - 2101 Fax: (862) 204 - 5906



Aura12 is a stylish yet rugged weatherproof intercom system. It allows tenants to remotely control access to their building from the convenience of their phone. Installation is fast & simple. The two-way audio allows tenants to speak with visitors, while it's one-way video protects the tenant's privacy. Aura12 delivers on both security & convenience.

Property Managers:

- Management Console to set up building tenants
- Cloud base Console for tenant management.
- Door camera access at all times.
- Facilitate package delivery process.

Tenants:

- Phone App to view & grant access remotely.
- Convenient Keyless entry.
- Create visitors QR codes.
- Receive calls from intercom on device of your choice.



SMART. SIMPLE. SAFE.




Why Choose Aural2?


For Property Managers: Whoo intercom is the smart apartment video intercom which allows your tenants in a multi-family building to speak with their visitors in real-time and let them in with the push of a button.


For Tenants: Whoo intercom is the smart apartment video intercom which allows you to have total control of your visitors. You can grant them access remotely using your smart device, or send a QR code for easy visit access to the convenience of letting yourself in with the use of a keyless entry code.

AURA12 DIMENSIONS










DM10 DIMENSIONS





AURA12 SPECIFICATIONS

System	Operation System	Android 9.0
	CPU	64-bit 8 Core Customized Computer Vision CPU
	Storage	2GB LPDDR3 16GB eMMC
Basic	Display	8-inch TFT LCD Color Screen
	Screen Type	Capacitive Touch Screen
	Resolution	800*1280 pixels
	Camera	2MP Binocular Camera+Wide-angle Video Intercom Camera(FOV 117°±3%)
	Card Type	In-display multi-tech cards reading; supports 125kHz and 13.56MHz card module.
Communication	WLAN	2.4GHz, IEEE 802.11 b/g/n
	Bluetooth	4.2 LE and earlier
	LTE FDD	B1/B3/B5/B8
Performance	Protection Rating level	IP65
	Card Reading Distance	≤1 in
General	Power Supply	DC 12V 3A
	Power Consumption	4-8W
	Dimensions	9in*5.5in*0.5in
	Packaging Dimensions	10.63in*7.36in*4.61in
	Back Box for Aura12	9in*5.in*2in
	Operating Temperature	(-4°F to 131°F (-20°C to 55°C)
	Operating Humidity	< 90% RH
	Storage Temperature	-13°F to 140°F (25°C to 60°C)
	Storage Humidity	< 90% RH
	Working Environment	Outdoor
	Gross Weight	0.8kg
	Installation Method	Pole mounted (entrance gate) & Wall-mounted
	Certifications	CE, FCC, RoHS, ISO9001, ISO14001, ISO20000